

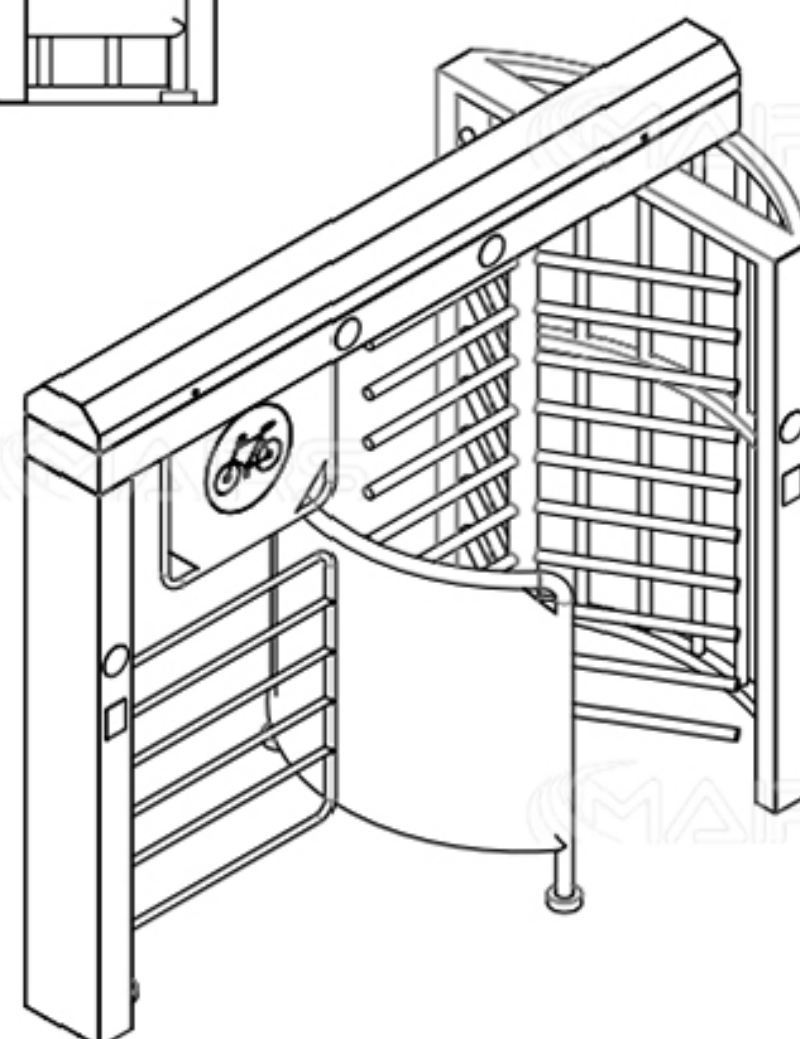
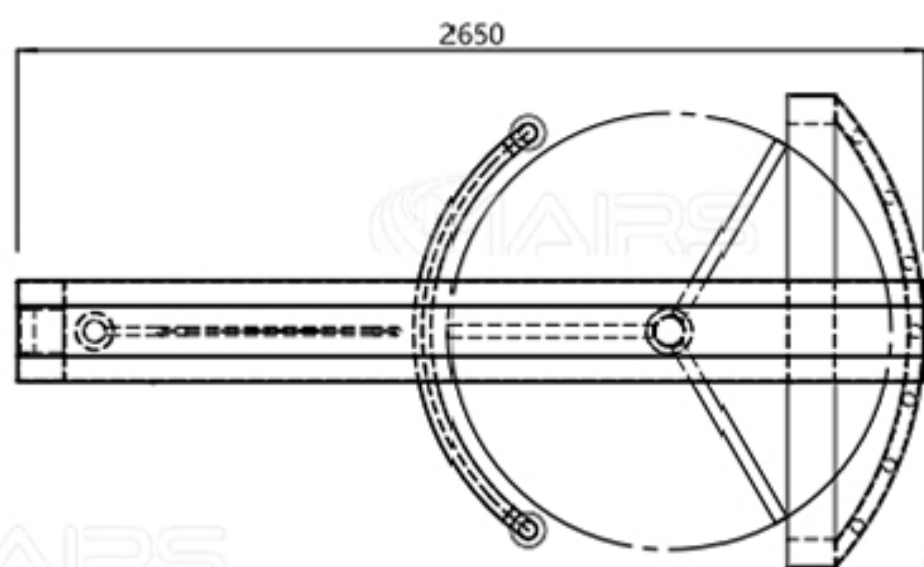


# Technical Specifications

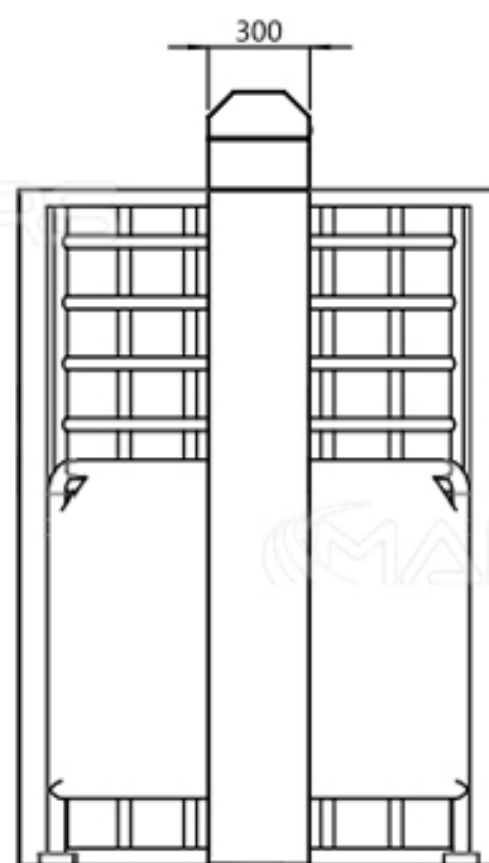

|                          |                                    |
|--------------------------|------------------------------------|
| Size:                    | 2580*1300*2290 mm                  |
| Lane Width:              | 650 mm (rotor) 900mm (handicapped) |
| Material:                | 304 stainless steel                |
| Passing speed:           | 25 person/min                      |
| Power supply:            | 110V/220V 50/60hz                  |
| Time needed for opening: | 0.2 s                              |
| Solenoid:                | DC24V                              |
| Gate Open Signal:        | Dry Contact/ Relay                 |
| Reliability:             | 5 million                          |
| Working temperature:     | -25°C ~ 60°C                       |

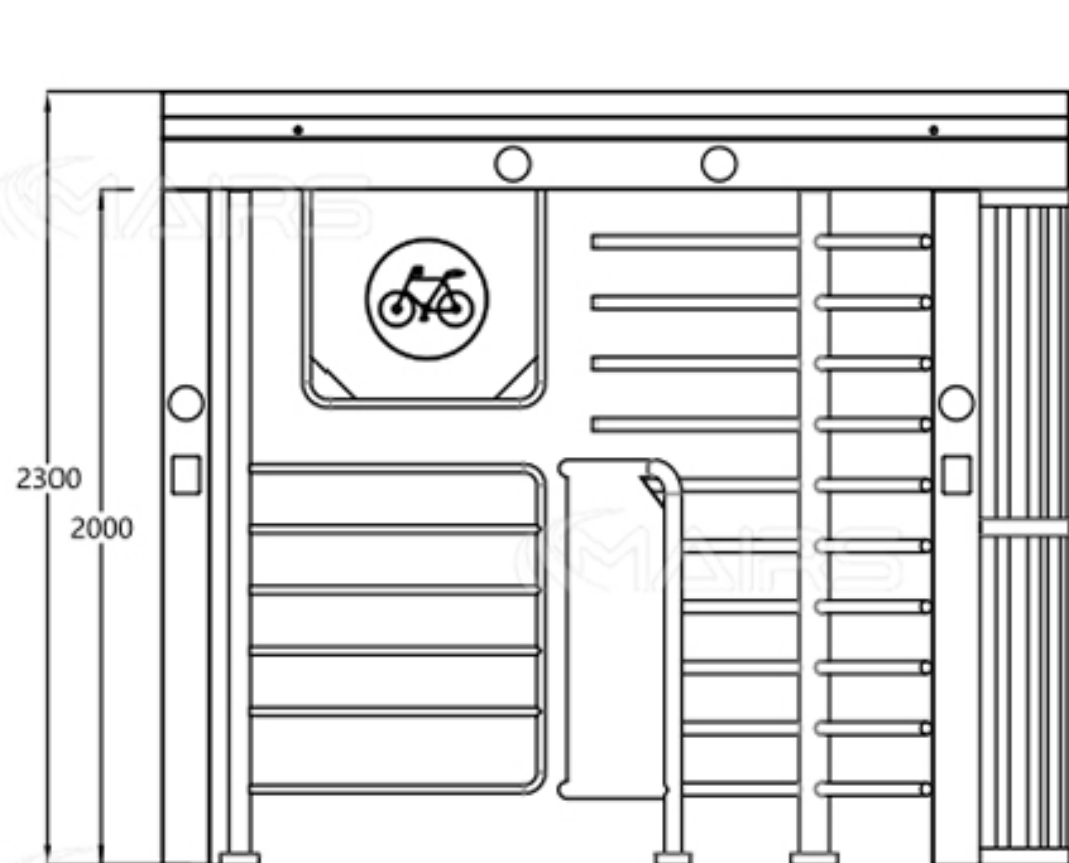

# FULL HEIGHT BICYCLE TURNSTILE STAINLESS STEEL

**TS-FH18**  
Bi-Direction



## Parameter:

Indoors or outdoors  
Bidirectional/Single directional  
Semi-automatic Operated



## Functions

- Bi-directional passage
- Electrical controls for both directions
- Integration with any identification or access control system
- Automatic reset of barrier wings after each passage
- Push button switch override controls for emergency situations
- Cable or wireless remote control
- Modular plug-in electronics provides for easy and quick repairs

